

SOLUTIONS PREPARED BY- ARIJIT MONDAL &
PRIYA J. NADKARN

Indian Institute of Science

E9: 252: Mathematical Methods and Techniques in Signal Processing

Instructor: Shayan Srinivasa Garani

Mid Term Exam#1, Fall 2017

Name and SR.No:

Instructions:

- You are allowed only 5 pages of A4 pages written on both sides and a calculator for this exam. No wireless allowed.
- The time duration is 3 hrs.
- There are five main questions. None of them have negative marking.
- Attempt all of them with careful reasoning and justification for partial credit.
- Make any reasonable assumptions if really required.
- Do not panic, do not cheat.
- Good luck!

Question No.	Points scored
1	
2	
3	
4	
5	
Total points	

PROBLEM 1: This problem has 2 parts.

- (1) Is the set $1, t, t^2, \dots, t^m$ linearly dependent? Justify. (10 pts.)
 (2) Let $X = L_2[-\pi, \pi]$. Let $S_1 = \text{span}(1, \cos(t), \cos(2t), \dots)$ and $S_2 = \text{span}(\sin(t), \sin(2t), \dots)$.
 Examine if $\dim(S_1 \oplus S_2) = \dim(S_1) + \dim(S_2)$. (10 pts.)

1) Consider the set of all polynomials of degree m or less. Let us assume that the set $\{1, t, \dots, t^m\}$ is linearly independent. According to our assumption, we get,

$$\alpha_1 + \alpha_2 t + \dots + \alpha_{m+1} t^m = 0 \quad - (i)$$

(where $\alpha_1, \alpha_2, \dots, \alpha_{m+1}$ are constants)

At least one of α_i for $1 \leq i \leq m+1$ in eq (i) is non-zero and $\alpha_{m+1} \neq 0$. The above equation is true for any value of t .

Hence, the above equation has infinite solutions. But according to fundamental theorem of algebra, the above equation can have exactly ' m ' roots which leads to a contradiction. Hence the set $\{1, t, \dots, t^m\}$ is linearly independent.

2) The collection $S_a = \{1, \cos(t), \cos(2t), \cos(3t), \dots\}$ is orthogonal on $(-\pi, \pi)$

Proof :-

$$\int_{-\pi}^{\pi} \cos(mt) \cos(nt) dt \quad \text{for } m \neq n$$

$$= \frac{1}{2} \int_{-\pi}^{\pi} \{\cos((m+n)t) + \cos((m-n)t)\} dt$$

$$= \frac{1}{2} \left[\frac{\sin((m+n)t)}{m+n} + \frac{\sin((m-n)t)}{m-n} \right]_{-\pi}^{\pi} = 0$$

Similarly, the collection $S_b = \{\sin(t), \sin(2t), \dots\}$ is orthogonal on $[-\pi, \pi]$.

As S_a and S_b are orthogonal sets, they are also linearly independent.

Now $S_1 = \text{Span}(S_a)$ and $S_2 = \text{Span}(S_b)$

Thus S_a and S_b form basis of S_1 and S_2 respectively

It can also be shown that S_1 and S_2 are orthogonal subspaces.

Proof :- $\int_{-\pi}^{\pi} \sin(mt) \cos(nt) dt$ $\begin{matrix} m > 0 \\ n > 0 \end{matrix}$ m, n are integers

$$= \frac{1}{2} \int_{-\pi}^{\pi} [\sin(m+n)t + \sin(m-n)t] dt$$

$$= \frac{-1}{2} \left[\frac{\cos(m+n)t}{m+n} + \frac{\cos(m-n)t}{m-n} \right]_{-\pi}^{\pi}$$

$$= 0$$

As S_1 and S_2 are orthogonal subspaces, their intersection is 0. $\Rightarrow S_1 \oplus S_2$ is a direct sum

$$\text{So, } \dim(S_1 \oplus S_2) = \dim(S_1) + \dim(S_2)$$

PROBLEM 2: This problem has 2 parts.

- (1) Let $e[n]$ denote a white noise sequence, and let $s[n]$ be a sequence uncorrelated with $e[n]$. Examine if $y[n] = s[n]e[n]$ is white. (10 pts.)
- (2) Let $x[n]$ be a real stationary white noise sequence with zero mean and variance σ_x^2 . Determine the output variance if $x[n]$ is filtered through a cascade of two filters with responses $h_1[n]$ and $h_2[n]$. You can assume that the filters have infinite taps. (10 pts.)

$$1) \quad y[n] = s[n] e[n]$$

Given, $e[n]$ is white

$$\Rightarrow E[e[n]] = 0$$

$$\text{Var}[e[n]] = \sigma_x^2$$

$$E[e[n] e^*[n-m]] = 0$$

Given, $s[n]$ and $e[n]$ are uncorrelated

$$\Rightarrow E[e[n] s[n]] = E[e[n]] E[s[n]]$$

Now,

$$E[y[n]] = E[s[n] e[n]] = E[s[n]] E[e[n]] = 0$$

(as $E[e[n]] = 0$)

$$\text{Var}[y[n]] = E[s^2[n] y^2[n]]$$

$$\begin{aligned} E[y[n] y[m]] &= E[e[n] e[m] s[n] s[m]] \\ &= E[e[n] e[m]] E[s[n] s[m]] \\ &= 0 \end{aligned}$$

$$\begin{aligned} \text{Var}[y[n]] &= E[y[n]^2] = E[s^2[n] e^2[n]] \\ &= E[s^2[n]] E[e^2[n]] \\ &= \sigma_s^2 \sigma_x^2 \end{aligned}$$

$\Rightarrow y[n]$ is white

2) $x[n] \rightarrow$ real stationary white noise sequence with zero mean and variance σ_x^2

$$y[n] = h_1[n] * h_2[n] * x[n]$$

let $h[n] = h_1[n] * h_2[n]$, then,

$$y[n] = \sum_{m=-\infty}^{\infty} h[m] x[n-m]$$

$$E[y[n]] = E\left[\sum_{m=-\infty}^{\infty} h[m] x[n-m]\right] = \sum_{m=-\infty}^{\infty} h[m] E[x[n-m]] = 0$$

$$E[y[n]^2] = E\left[\sum_{k=-\infty}^{\infty} h[k] x[n-k] \sum_{l=-\infty}^{\infty} h[l] x[n-l]\right]$$

$$= \sum_{k=-\infty}^{\infty} \sum_{l=-\infty}^{\infty} h[k] h[l] E[x[n-k] x[n-l]]$$


Now, we know that,

$$E[x[n-k] x[n-l]] = \sigma_x^2 \delta_{k,l}$$

$$\Rightarrow E[y[n]^2] = \left(\sum_{k=-\infty}^{\infty} h[k]^2\right) \sigma_x^2$$

PROBLEM 3: Derive a general form of state space representation for N cascaded LTI systems. Assume that each system in the cascade has a state space representation $A_i, b_i, c_i^T, d_i = 0$ for $0 \leq i \leq N-1$. (10 pts.)

consider the systems in cascade as follows:



Now, we know that

$$w_1(n+1) = A_1 w_1(n) + b_1 x_0(n)$$

$$x_1(n) = c_1^T w_1(n)$$

For $i \in \{2, \dots, N\}$,

$$w_i(n+1) = A_i w_i(n) + b_i x_{i-1}(n)$$

$$x_i(n) = c_i^T w_i(n)$$

$$\Rightarrow w_i(n+1) = A_i w_i(n) + b_i c_{i-1}^T w_{i-1}(n)$$

let us consider the state vector to be $[w_N(n) \ w_{N-1}(n) \ \dots \ w_2(n) \ w_1(n)]^T$ then,

$$\begin{bmatrix} w_N(n+1) \\ w_{N-1}(n+1) \\ \vdots \\ w_1(n+1) \end{bmatrix} = \begin{bmatrix} A_N & b_N c_{N-1}^T & & & \\ & A_{N-1} & b_{N-1} c_{N-2}^T & & \\ & & \ddots & \ddots & \\ & & & A_2 & b_2 c_1^T \\ & & & & A_1 \end{bmatrix} \begin{bmatrix} w_N(n) \\ w_{N-1}(n) \\ \vdots \\ w_2(n) \\ w_1(n) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ b_1 \end{bmatrix} x_0(n)$$

$$\text{and } y(n) = x_N(n) = c_N^T w_N(n)$$


$$= [c_N^T \ 0 \ \dots \ 0] \begin{bmatrix} w_N(n) \\ w_{N-1}(n) \\ \vdots \\ w_1(n) \end{bmatrix}$$

\Rightarrow for the cascaded system,

$$A = \begin{bmatrix} A_N & b_N c_{N-1}^T & & & \\ & A_{N-1} & b_{N-1} c_{N-2}^T & & \\ & & \ddots & \ddots & \\ & & & A_2 & b_2 c_1^T \\ & & & & A_1 \end{bmatrix}, \quad b = \begin{bmatrix} 0 \\ 0 \\ \vdots \\ 0 \\ b_1 \end{bmatrix} \quad \text{and } c = \begin{bmatrix} c_N \\ 0 \\ \vdots \\ 0 \end{bmatrix}$$

and $d = 0$.

PROBLEM 4: The system shown in Figure approximately interpolates a discrete time sequence $x[n]$ by a factor L . Suppose that the linear filter has impulse response $h[n] = h[-n]$ and $h[n] = 0$ for $|n| > (RL - 1)$, where R and L are integers; i.e., the impulse response is symmetric and of length $2RL - 1$ samples.

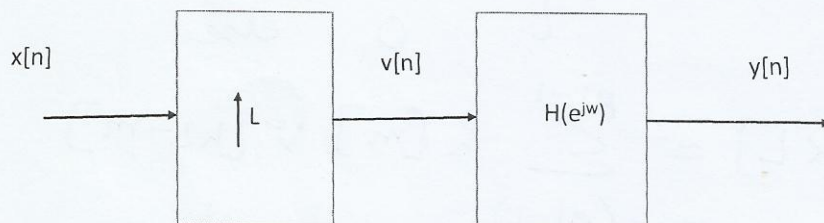

- (1) How much delay must be inserted to make the system causal? (5 pts.)
- (2) What conditions must be satisfied by $h[n]$ such that $y[n] = x[\frac{n}{L}]$ for $n = 0, \pm L, \pm 2L, \dots$? (5 pts.)
- (3) By exploiting the symmetry of the impulse response of the filter, show that each sample of $y[n]$ can be computed with no more than RL multiplications. (5 pts.)
- (4) By taking advantage of the fact that multiplications by zero need not be done, show that only $2R$ multiplications per output sample are required. (5 pts.)

$$v[n] = \begin{cases} x[n/L] & n \bmod L = 0 \\ 0 & \text{else} \end{cases}$$

$$V(z) = X(z^L)$$

$$Y(z) = X(z^L) H(z)$$

$$1) \quad y[n] = v[n] * h[n]$$

$$= \sum_{m=-\infty}^{\infty} h[m] v[n-m]$$

$$= \sum_{m=-(RL-1)}^{RL-1} h[m] v[n-m]$$

$$n-m \bmod L = 0$$

Can $n+RL-1 \bmod L = 0$?

Yes, when $n-1 = RL$

\therefore As we have term upto $x[n+RL-1] \Rightarrow$ delay of $(RL-1)$ is needed at $v[n]$

\Rightarrow Does $n+RL-1 \bmod L = 0$

If so, at $x[n]$, the delay must be $\frac{n+RL-1}{L}$

\Rightarrow delay of R is needed.

$$4.2) \quad y[n] = \sum_{m=-(RL-1)}^{RL-1} h[m] v[n-m]$$

$$\text{Now, } v[n] = \begin{cases} x[n/L] & n \bmod L = 0 \\ 0 & \text{else} \end{cases}$$

$$v[n-m] = \begin{cases} x\left[\frac{n-m}{L}\right], & n-m \bmod L = 0 \\ 0 & \text{else} \end{cases}$$

$$y[kL] = \sum_{m=-(RL-1)}^{RL-1} h[m] v[kL-m]$$

$$v[kL-m] = \begin{cases} x\left[\frac{kL-m}{L}\right] & kL-m \bmod L = 0 \\ 0 & \text{else} \end{cases}$$

$$= \begin{cases} x[k-m/L] & m \bmod L = 0 \\ 0 & \text{else} \end{cases}$$

$$\Rightarrow y[kL] = \sum_{m=-(R-1)}^{R-1} h[mL] x[k-m]$$

$$4.3) \quad y[n] = \sum_{m=-(RL-1)}^{RL-1} h[m] v[n-m]$$


$$= \sum_{m=-(RL-1)}^{-1} h[m] v[n-m] + \sum_{m=0}^{RL-1} h[m] v[n-m]$$

$$= h[0] v[n] + \sum_{m=1}^{RL-1} h[m] [v[n-m] + v[n+m]]$$


\therefore Only RL multiplications are required

4.4) From $-(RL-1)$ to $(RL-1)$, there are $2R$ multiples of L and hence only $2R$ multiplications per output sample are required.




PROBLEM 5: Suppose you obtained a sequence $s[n]$ by filtering a speech signal $s_c(t)$ with a continuous time low pass filter with a cutoff of 5 KHz and then sampling it at 10 KHz rate shown in Figure (a). Unfortunately, the speech signal $s_c(t)$ is destroyed once $s[n]$ was stored on a disk drive. Later you decided that you should have followed the process in Figure (b). Develop a method to obtain $s_1[n]$ from $s[n]$ using appropriate processing. Suppose it was required to filter $s_1[n]$ through a discrete time filter $H(z)$ for any post processing. Show how you will realize this efficiently using signals $s[n]$ and $H(z)$. (30 pts.)

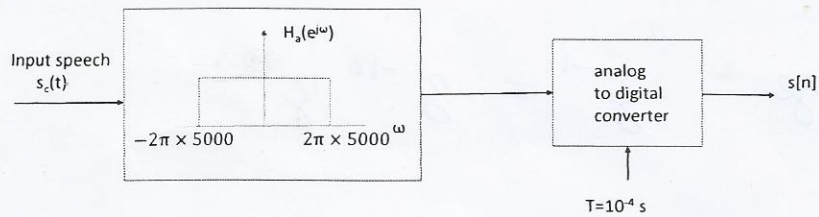


(a)

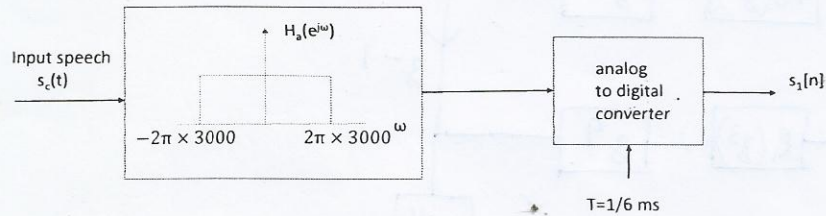


(b)

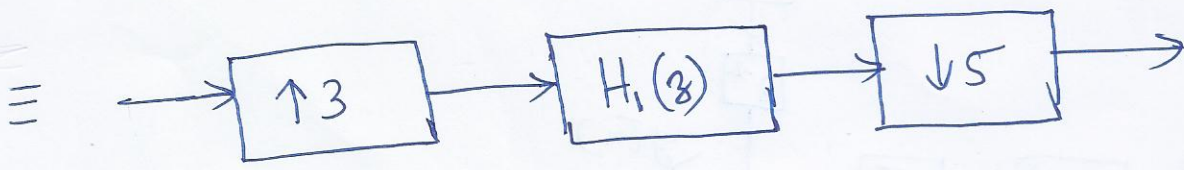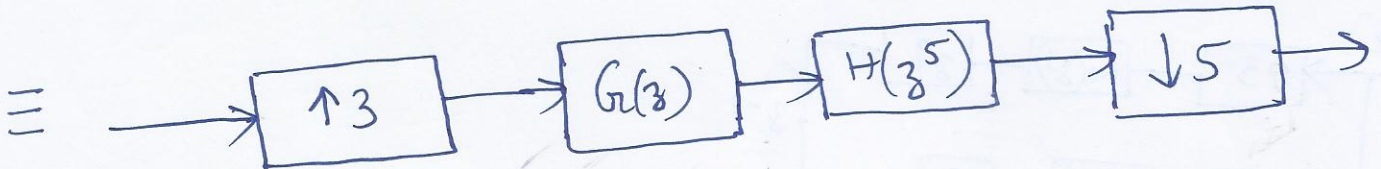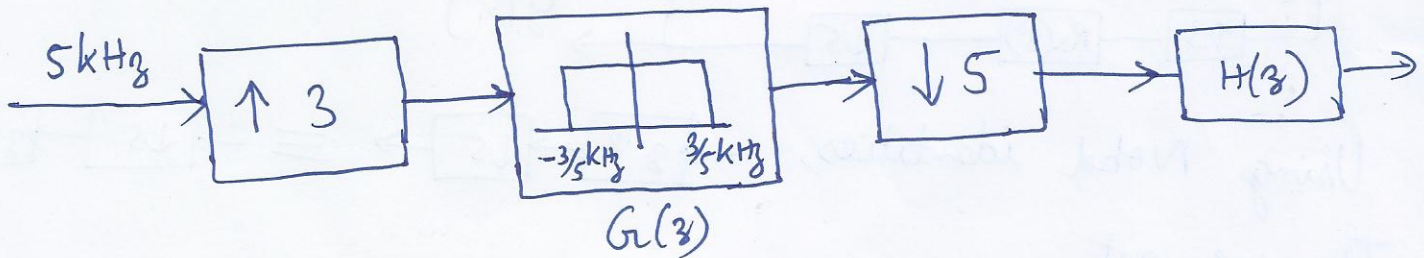

We need polyphase decomposition similar to Hradic's work.

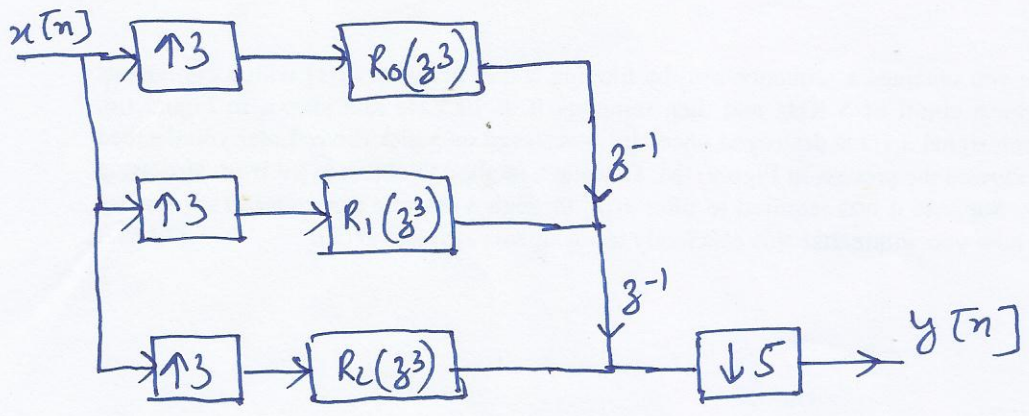


Realize $z^{-1} = z^{-10} z^9$

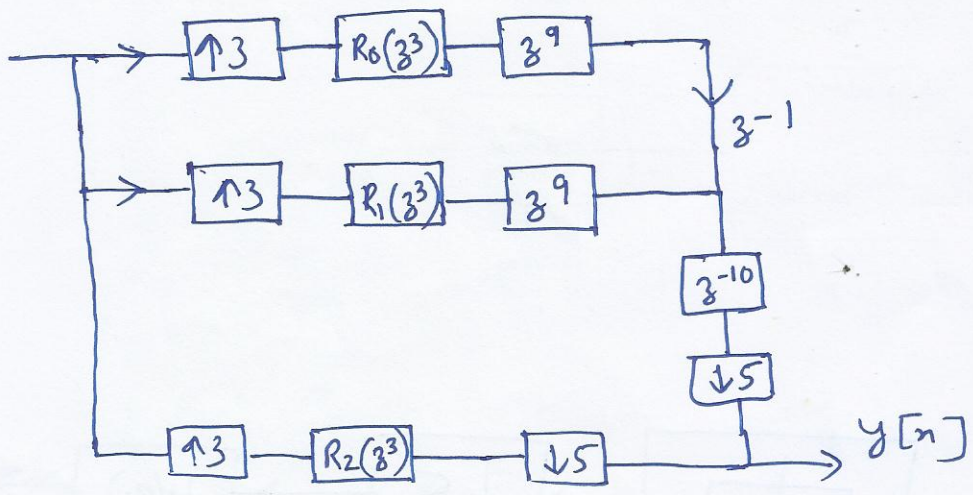


Using Nodd identities, $z^{-10} \downarrow 5 \rightarrow \equiv \rightarrow \downarrow 5 \rightarrow z^{-2}$


Thus we get

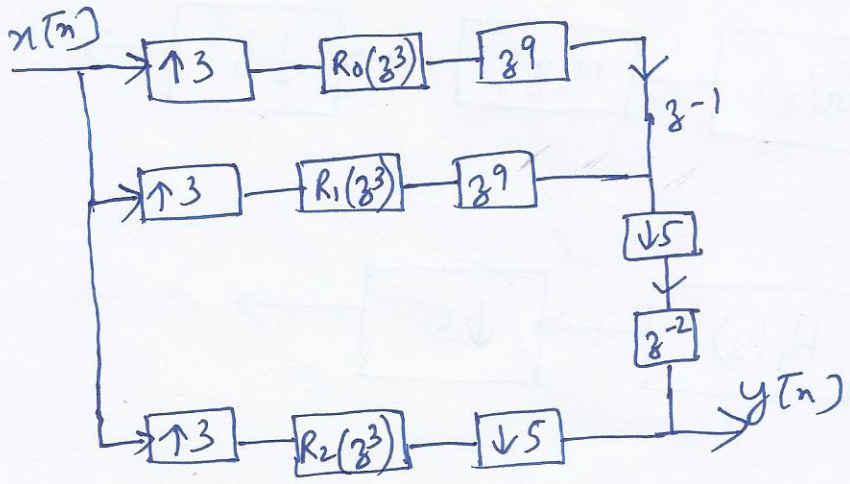


Proceeding similarly as above our architecture becomes

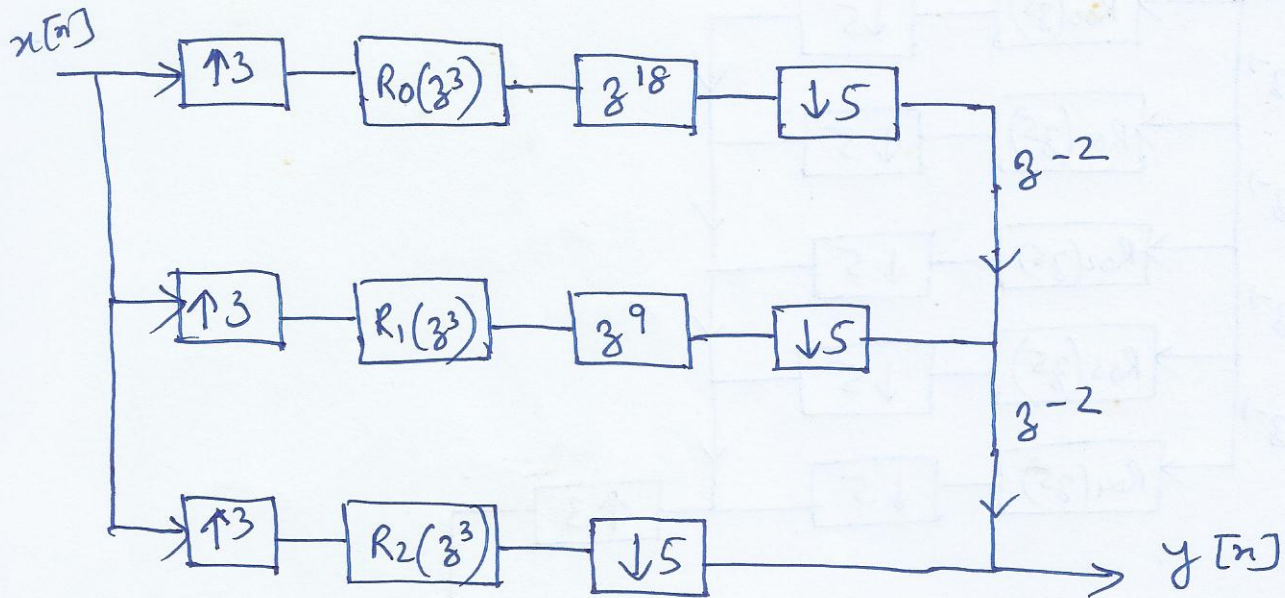


Using noble identities we get,

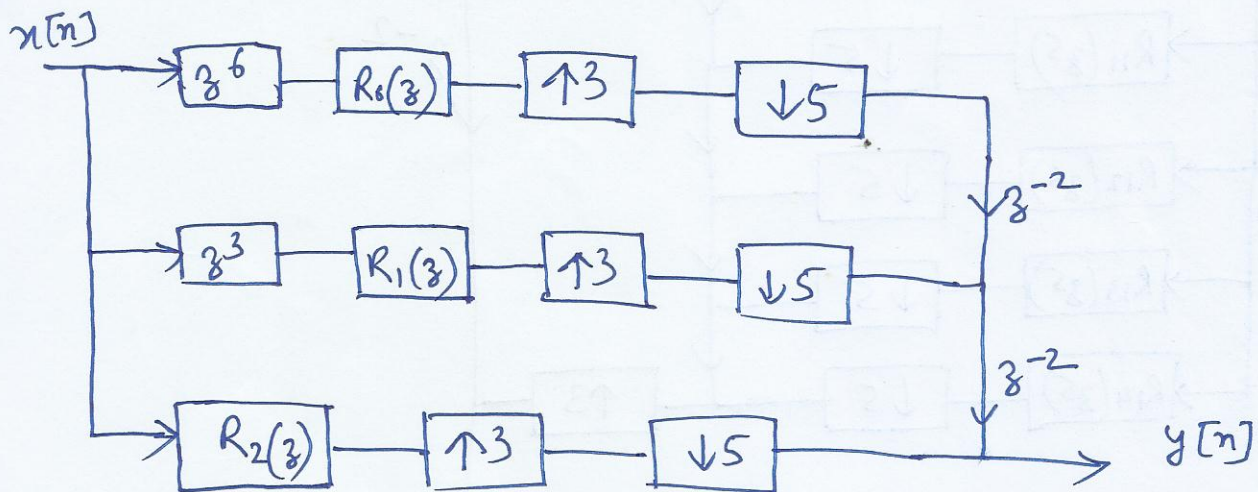

$\gcd(3, 5) = 1$, so we can swap $\uparrow 3$ & $\downarrow 5$

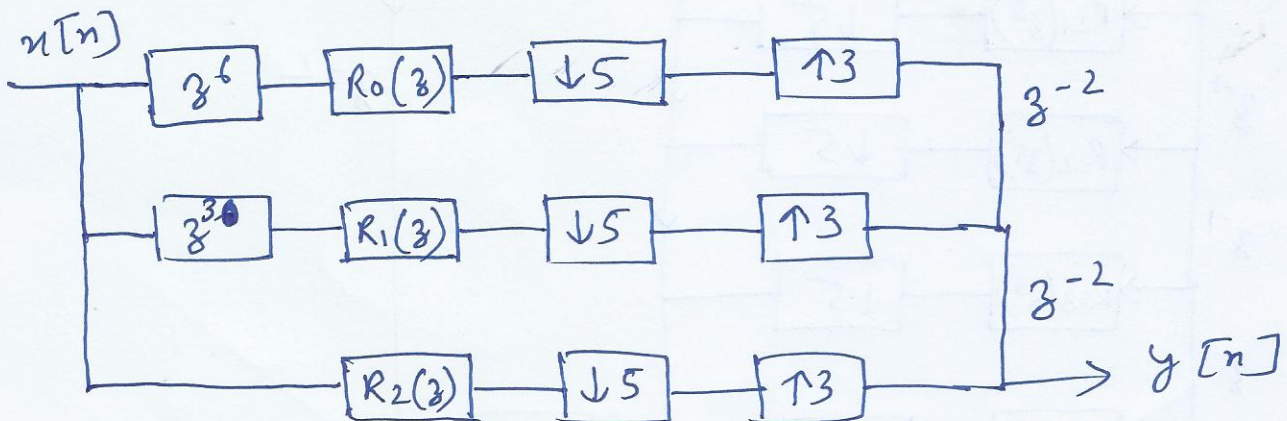

Using polyphase decomposition again we get,

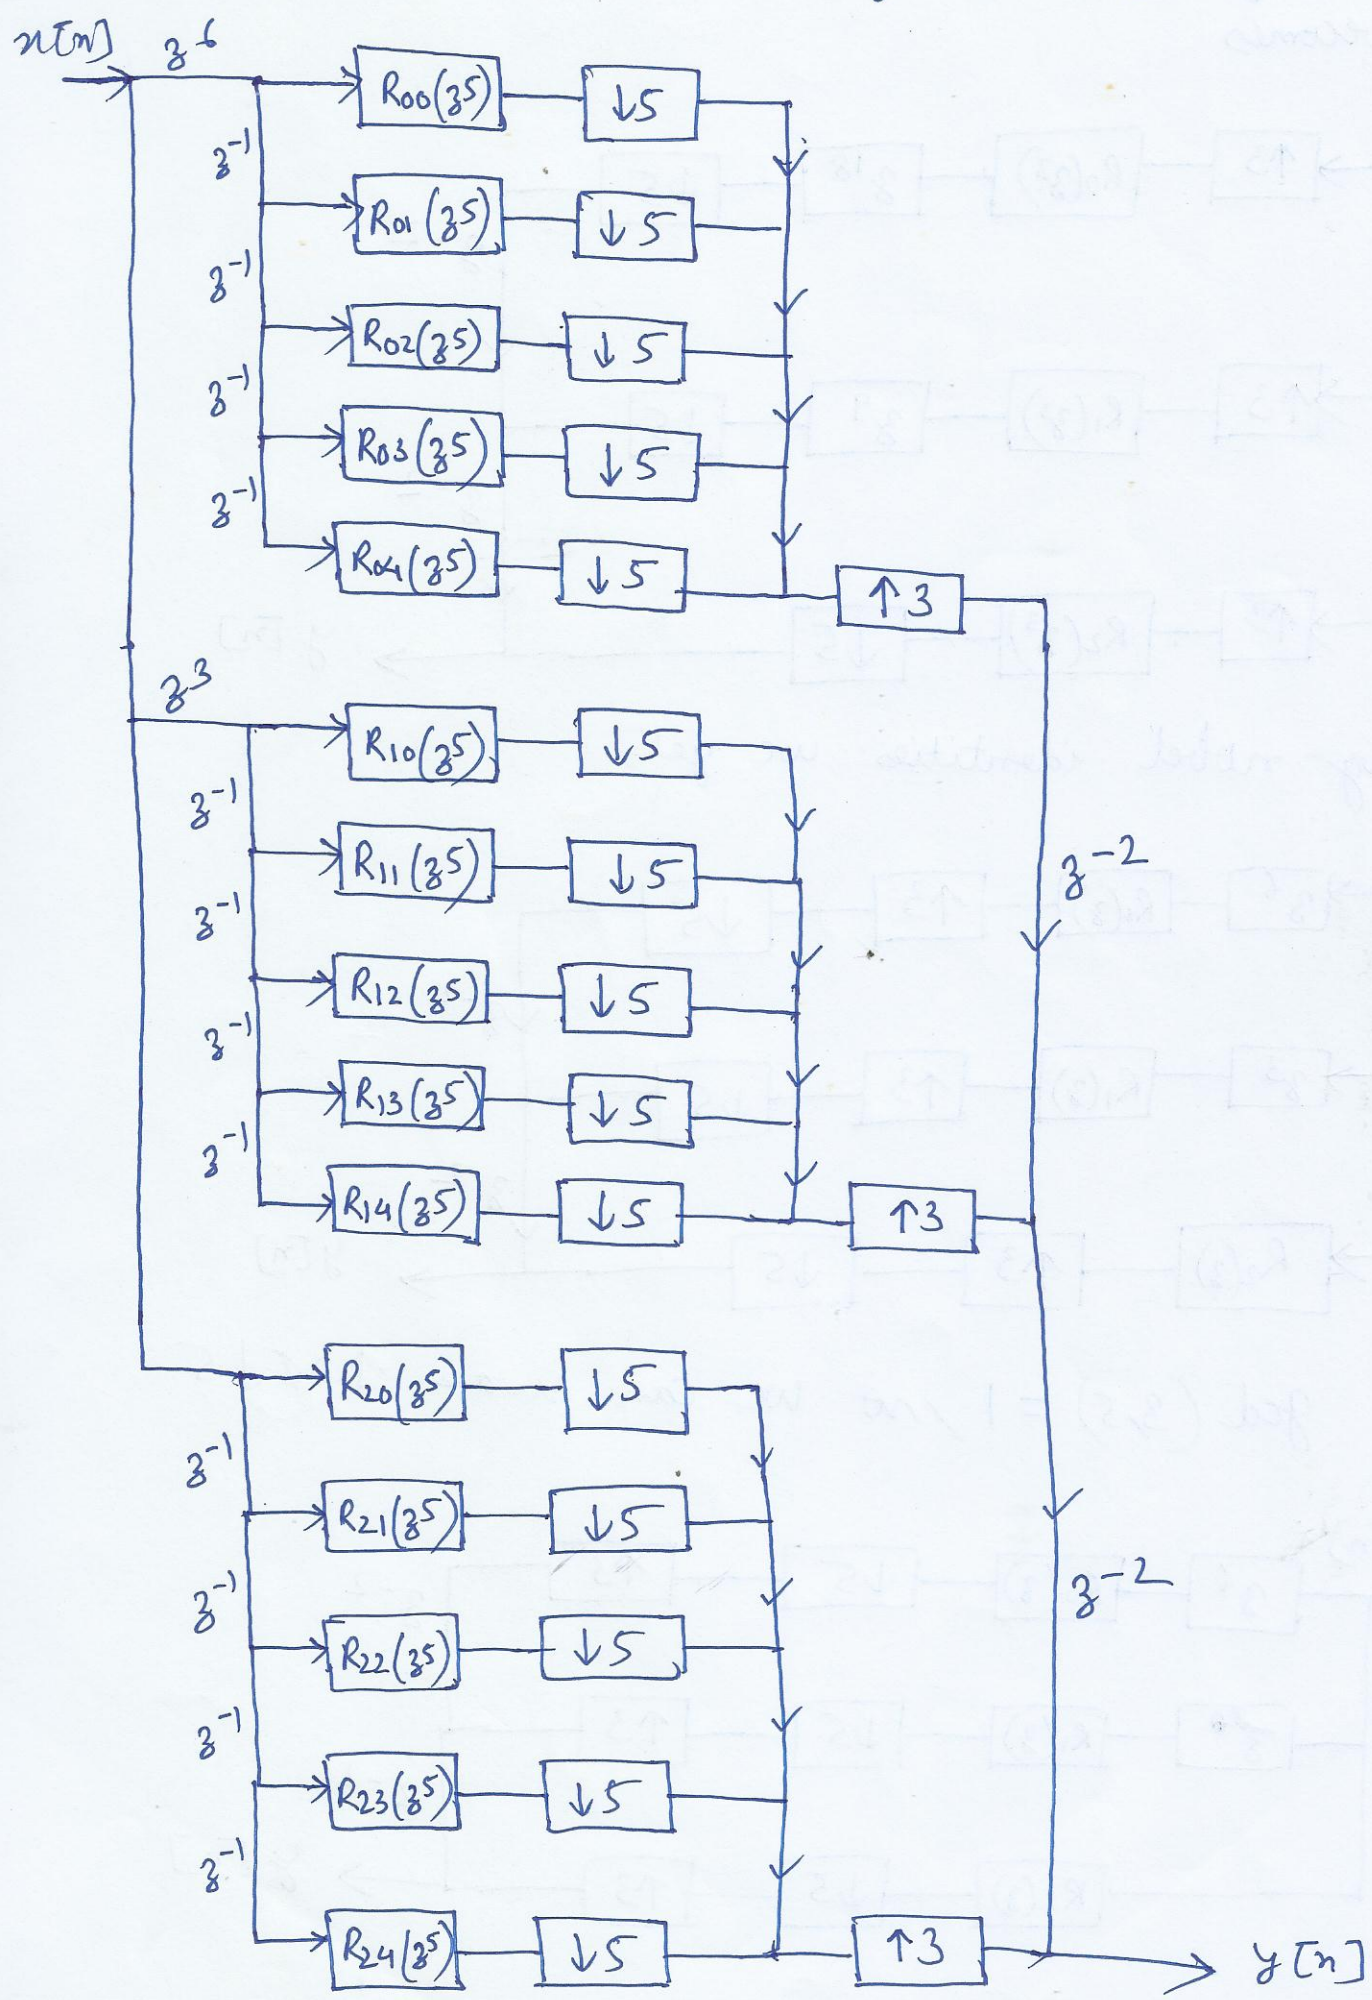

Final architecture